


## 272-715 Dissectible Sight Flow Indicator Sample

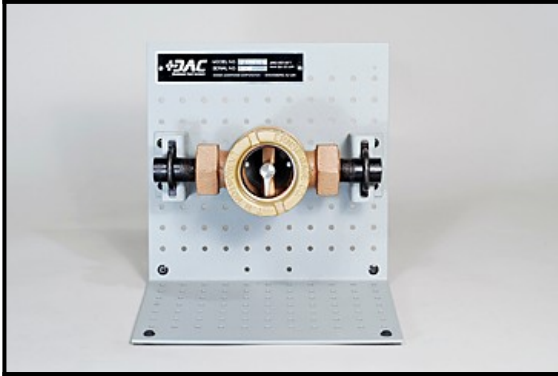

### Product Dimensions

(L x W x H)  
 8-1/2in x 8-1/2in x 8-1/2in (216 x 216 x 216 mm)  
 8.5 lbs (3.8 kg)

### Shipping Dimensions

(L x W x H)  
 12in x 12in x 12in (305 x 305 x 305 mm)  
 10 lbs (4.5 kg)

### FEATURES AND SPECIFICATIONS

- Industrially relevant samples are selected by leading manufactures such as John C. Ernst, OPW and others.
- 13-Gauge formed-steel and powder-coated mounting baseplate with formed-steel mounting brackets.
- Provision for mounting on related DAC bench, display and workstation products.
- Packaging for shipment via parcel service.

### SERVICE REQUIREMENTS

None

### COURSE CONTENT

- No dedicated courseware provided. (see above)

### GENERAL DESCRIPTION

This Sight Flow Indicator sample allows for close visual inspection of a common in-line flow indicator to better understand its function, design, and operation.

The process component is prepared for complete disassembly using simple tools for closer inspection and visualization of the maintenance process.

Mounted on a modular formed-steel mounting stand, the device can be easily removed for closer examination and simulated maintenance activities.

### OPTIONS

- [#902V - Mobile Display Stand](#)
- [#920 - Display/Support Assembly](#)

### RELATED ITEMS

- [#272-475 - Dissectible Liquid Level Gauge Sample](#)
- [#272-718 - Variable Area Flow Meter, Dissectible](#)
- [#272-980 - Dissectible Pressure Control Switch Sample](#)

### STANDARD ACCESSORIES

- Original equipment maintenance and instruction manuals are provided, where possible.

The equipment sample provided will be modified for training purposes, making it unfit for use in production applications.